

STAINLESS STEEL CABLE TIES


Self-Locking Ties

316 Remora Stainless Steel

The Ball Lock range of stainless steel cable ties are manufactured from 316 stainless steel and have a high tensile strength. The self-locking head design speeds installation and locks into place at any length along the tie. The fully enclosed head does not allow dirt or grit to interfere with the locking mechanism. These ties are flame-proof, tough and corrosion resistant and are ideal for demanding industries such as mass transit, ship building, oil rigs, and mining.


The Ball Lock range is available in bare stainless steel or coated with halogen free pure polyester/epoxy in Black as standard or Blue, Green, Red and Yellow to order.

Locking Mechanism

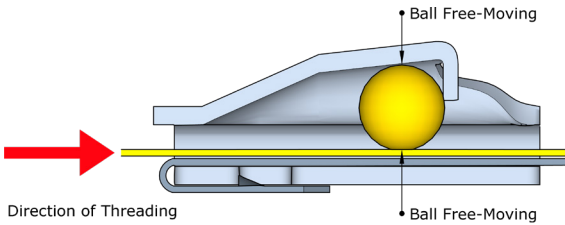


- The strap is locked into the head by means of the small ball-bearing.

- The ball locks into the small end of the wedged shaped housing.

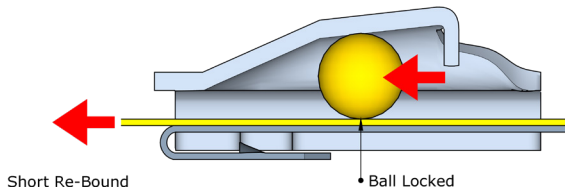


- Forming a positive locking with the strap.

- Rounded edges for safe handling.



Features and Benefits

- High tensile strength.
- High temperature range.
- High abrasion resistance.
- Rounded edges for safe handling.
- UV resistant.
- Flame-proof and Halogen free.



STAINLESS STEEL CABLE TIES | Cable Ties & Banding


STAINLESS STEEL CABLE TIES

316 Stainless Steel - Uncoated

- Salt spray, corrosion & weather resistant
 - Outstanding chemical resistance
- Temperature Range:** -80°C to 500°C
Material: 316 Stainless Steel
Standards: UL and DNV Certified



Stainless Steel Tie Base (see p.263)



Code	Length (A)	Width (B)	Max Bundle Dia.	Loop Tensile Strength (Kg)	Pack QTY
SSCT200x4.6	200	4.6	50.0	68.0	100
SSCT300x4.6	300	4.6	76.0	68.0	100
SSCT360x4.6	360	4.6	102.0	68.0	100
SSCT520x4.6	520	4.6	152.0	68.0	100
SSCT200x7.9	200	7.9	50.0	136.0	100
SSCT360x7.9	360	7.9	102.0	136.0	100
SSCT520x7.9	520	7.9	164.0	136.0	100

316 Stainless Steel - Coated

- Salt spray, corrosion & weather resistant
 - Outstanding chemical resistance
- Temperature Range:** -40°C to 150°C
Material: 316 Stainless Steel
Coating: Pure Polyester/Epoxy
Standards: UL and DNV Certified



Other colours available on request




Code	Length (A)	Width (B)	Max Bundle Dia.	Loop Tensile Strength (Kg)	Pack QTY
SSCT200x4.6-COATED	200	4.6	50.0	68.0	100
SSCT360x4.6-COATED	360	4.6	102.0	68.0	100
SSCT360x7.9-COATED	360	7.9	102.0	136.0	100
SSCT520x7.9-COATED	520	7.9	152.0	136.0	100

Manual Tensioning Tool

Tensions and cuts off Stainless Steel Ties up to 12.7mm wide regardless of material or coating.

Material: Steel




Code	Description
KE9222	Metal tool designed for coated or uncoated Stainless Steel cable ties up to 0.3mm and up to 12.7mm width. Once the desired tension is reached the tool has a manual lever to cut off tail excess tie length.



Stainless Steel Tensioning Tool

Hand tool designed for coated or uncoated Stainless Steel Cable Ties up to 7.9mm width. Complete with tension indicator and automatic excess tie cut-off.

Material: Steel



Code	Description
CT511	Metal tool designed for coated or uncoated Stainless Steel cable ties from 0.3 to 7.9mm width. Complete with tension indicator and automatic tie excess cut off



STAINLESS STEEL CABLE TIES

Releaseable Ties

316 Stainless Steel Buckle Ties

PPA coated cable ties feature a buckle type locking mechanism. This provides a quick and easy application which can be unfastened for re-using. The PPA Nylon coating is zero halogen which offers superior corrosion resistance. Suitable for multiple installations over long periods of time in harsh environments such as marine, oil exploration and mining.




316 Stainless Steel Releaseable Cable Ties

- Available in two widths 6.35mm & 9.53mm
- Zero Halogen PPA coated for superior corrosion resistance
- Thick coating protected cables and hands
- Fast, easy application
- Vibration proof
- Reusable

Temperature Range: -80°C to 105°C

Material: 316 Stainless Steel

Coating: Zero Halogen PPA Nylon Coating

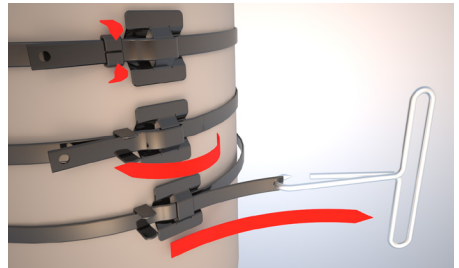

Code	Length (A)	Width (B)	Max Bundle Dia.	Loop Tensile Strength (N)	Pack QTY
SSRT100X6.3	100.0	6.35	18.0	1,469.0	100
SSRT229X6.3	229.0	6.35	59.0	1,469.0	100
SSRT305X6.3	305.0	6.35	91.0	1,469.0	100
SSRT457X6.3	457.0	6.35	129.0	1,469.0	100
SSRT457X9.5	457.0	9.53	129.0	2,000.0	100
SSRT610X9.5	610.0	9.53	177.0	2,000.0	100

Manual Tensioning Hook

Used to tension Ties and Multi-Lok Ties.

Material: Steel



Code	Description
AE2011	Hand tensioning hook for reusable cable ties



Stainless